


Bluefish444 Release Notes

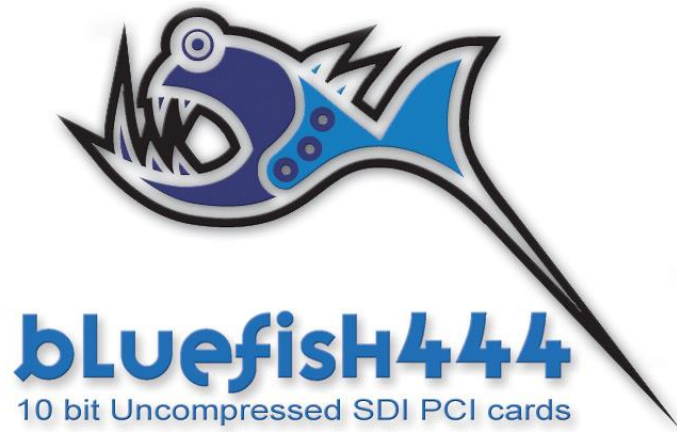

Bluefish444 Mac OSX Installer v 7.7.4

Mac OS X

**SD|Prime**

**Wednesday, August 29, 2007**

## **Bluefish444 7.7.4 Release Notes**

### **SD|Prime Installer**

This installer supports Apple MacOS 10.4.10

This installer supports Apple Final Cut Studio (6.0.1) with QuickTime 7.2

This installer supports:

- Mac Pro Quad 2.66GHz (2GB RAM)

### **Support for the following Bluefish444 Hardware :**

-SD|Prime

### **Recommendation:**

It is recommended that you disable Spotlight on the Capture/Scratch volume. Open System Preferences, select Spotlight, then on the Privacy tab add the appropriate disk volume.

### **Features:**

- Support for NTSC and PAL
- Support for 8 and 10 bit video I/O:
  - Output: SDI
  - Input: SDI
- Support for Apple Uncompressed 4:2:2 8 and 10 bit QuickTime formats
- Support for Apple DV, DVCPRO, DVCPRO50 and 8 bit ARGB formats
- Support for 8 channel playback/capture of AES/EBU digital audio
- Support for multiple cards
- Support for the built-in RS-422

### ***Final Cut Studio support***

- Support for Final Cut Pro's RTExtreme software real-time effects in Apple Uncompressed 4:2:2 sequences
- Support for Offline mode - capture and playback of Photo JPEG clips, capture to Apple's OfflineRT format
- User presets for Final Cut Studio (6.0.1)
- Mirroring on desktop for Final Cut Studio (6.0.1)
- Non-realtime preview during capture

### ***After Effects CS 3 support***

- QuickTime video output support for Adobe After Effects
- Adobe After Effects RAM RealTime RAM preview

### ***Photoshop CS 3 support***

- Export plugin to preview video/alpha on broadcast monitor
- Import plugin to capture image from card input

### ***Bluefish444 Feature Control***

- Ability to save/open settings as a profile
- Ability to adjust settings while other applications are using the card
- Improved AppleScript support to allow automated configuration of card settings
- Undo/Redo
- Notes panel to document your current settings using fully formatted and

internationalized text and images

- Displays driver and card firmware version

**Tips:**

- To restore your card settings, save your Bluefish444 Feature Control document and put it in your account's Startup Items, replacing the Bluefish444 Feature Control entry put there by the installer
- To improve DV/DVCPRO/DVCPRO50 playback quality, ensure Final Cut Pro's Playback Quality setting (in the RT pull-down menu of your sequence) is set to High (it defaults to Medium for these settings).

**Hardware Requirements:**

Mac Pro: ATTO UL5D PCIe SCSI card with 1.52 firmware, version 4.1.0 drivers

For deck control, the built-in RS-422 serial port.

Refer to the web site at [www.bluefish444.com](http://www.bluefish444.com) for further details.

A Playback Offset of +1 frame may be required in Final Cut Pro's Device Control Presets for accurate Edit To Tape.

A Capture Offset of +1.6 frames may be required in Final Cut Pro's Device Control Presets for accurate batch captures.

**Known Issues:**

- For timecode accurate capture, use Bluefish444 Feature Control to set the desktop video standard to the same as the input video standard.
- Power PC Rosetta applications will fail to access the Universal Bluefish444 Quicktime component.
- Edit to tape of RGB and ProRes(HQ) may result in a duplicate first frame.
- First frame of ProRes batch capture items may be missed.
- Analog audio levels are not calibrated correctly.

©Bluefish Technologies Pty Ltd 2007  
[www.bluefish444.com](http://www.bluefish444.com)